

**KB814 SERIES**

GENERAL PURPOSE  
HIGH ISOLATION VOLTAGE  
SINGLE TRANSISTOR TYPE  
PHOTOCOUPLER SERIES

**FEATURES**

- 1.AC Input
- 2.High isolation voltage between input and output (Viso=5000 Vr.m.s)
- 3.Compact dual-in-line package
  - KB814:1-channel type
  - KB824:2-channel type
  - KB834:3-channel type
  - KB844:4-channel type
- 4.Recognized by UL and CUL, file NO. E225308

**DESCRIPTION**

- 1.The KB814 series are optically coupled isolators containing two GaAs light emitting diode and an NPN silicon phototransistor.
- 2.The lead pitch is 2.54mm

**APPLICATIONS**


- 1.Computer terminals
- 2.Registers, copiers, automatic vending machines
- 3.System appliances, measuring instruments
- 4.Programmable logic controller
- 5.Signal transmission between circuits of different potentials and impedances

### KB814 SERIES

\* PACKAGE DIMENSIONS (UNIT: mm)

DIP Type

TOLERANCE :  $\pm 0.5[\pm 0.02]$  UNLESS OTHERWISE NOTED.

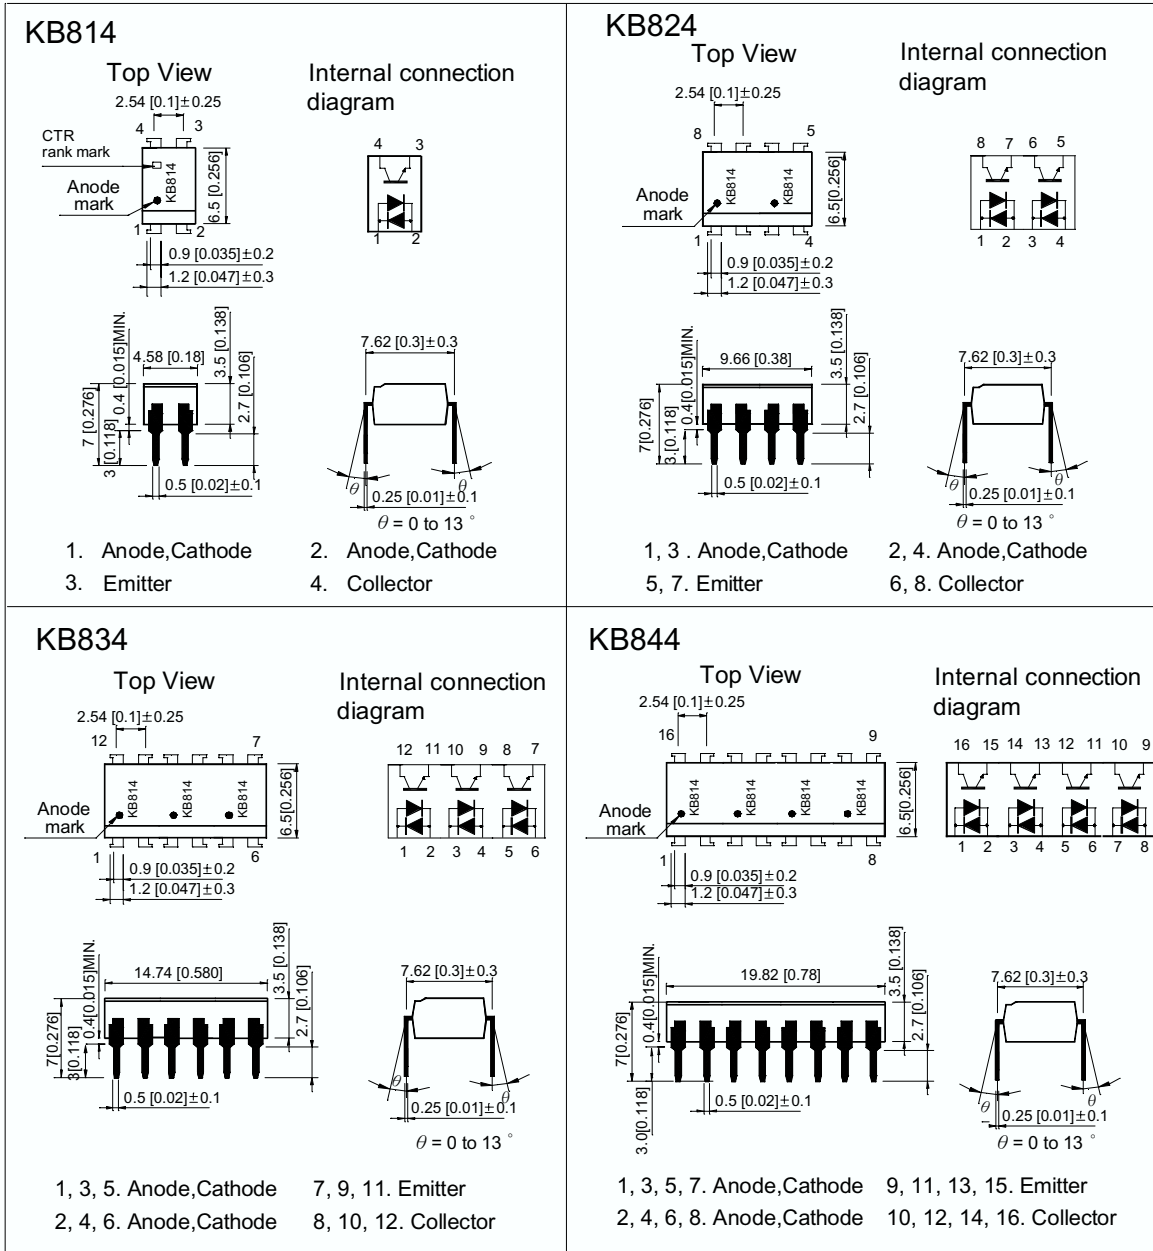

#### \* ORDERING INFORMATION

Part Number	Package	Packing Style
KB814	4-pin DIP	100pcs / each tube
KB824	8-pin DIP	50pcs / each tube
KB834	12-pin DIP	30pcs / each tube
KB844	16-pin DIP	25pcs / each tube

#### \* Absolute Maximum Ratings (Ta=25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	IF	± 50	mA
	Power dissipation	P	70	mW
Output	Collector-emitter voltage	V <sub>CEO</sub>	35	V
	Emitter-collector voltage	V <sub>ECO</sub>	6	V
	Collector current	I <sub>C</sub>	50	mA
	Collector power dissipation	PC	150	mW
Total power dissipation		P <sub>tot</sub>	200	mW
*1 Isolation voltage		Viso	5000	V <sub>r.m.s</sub>
Operating temperature		T <sub>opr</sub>	-30~+100	° C
Storage temperature		T <sub>stg</sub>	-55~+125	° C
*2 Soldering temperature		T <sub>sol</sub>	260	° C

\*1 40 to 60%RH, AC for 1 minute

\*2 For 10 seconds

### KB814 SERIES

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit	
Input	Forward voltage	$V_F$	$I_F = \pm 20\text{mA}$	—	1.2	1.4	V	
	Peak forward voltage	$V_{FM}$	$I_{FM} = \pm 0.5\text{A}$	—	—	3.0	V	
Output	Collector dark current	$I_{CEO}$	$V_{CE} = 20\text{V}, I_F = 0\text{mA}$	—	—	$10^{-7}$	A	
Transfer characteristics	*1 Current transfer ratio	CTR	$I_F = \pm 1\text{mA}, V_{CE} = 5\text{V}$	20	—	300	%	
	Collector-emitter saturation voltage		$V_{CE(sat)}$	$I_F = \pm 20\text{mA}, I_C = 1\text{mA}$	—	0.1	0.2	V
	Response time	Rise time	$t_r$	$V_{CE} = 2\text{V}, I_C = 2\text{mA}$ $R_L = 100\ \Omega$	—	4	18	$\mu\text{S}$
		Fall time	$t_f$		—	3	18	$\mu\text{S}$

\*1 Classification table of current transfer ratio is shown below.

$$\text{CTR} = \frac{I_C}{I_F} \times 100\%$$

Model NO.	Rank mark	CTR (%)
KB814A	A	50 to 150
KB824A		
KB834A		
KB844A		
KB814	A or no mark	20 to 300
KB824		
KB834		
KB844		

### KB814 SERIES

Fig. 1 Current Transfer Ratio vs. Forward Current

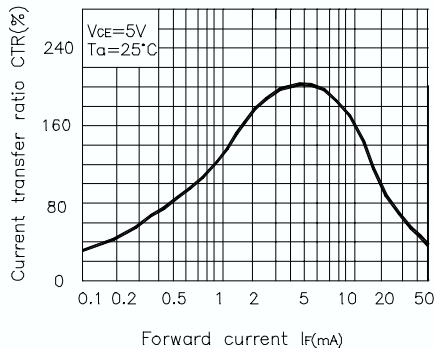


Fig. 2 Forward Current vs. Forward voltage

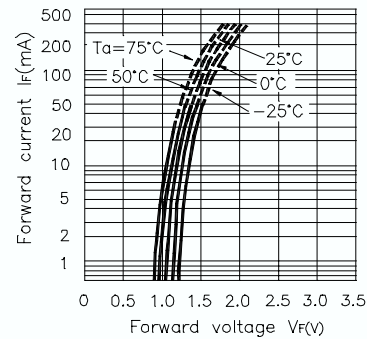


Fig. 3 Collector Current vs. Collector-emitter Voltage

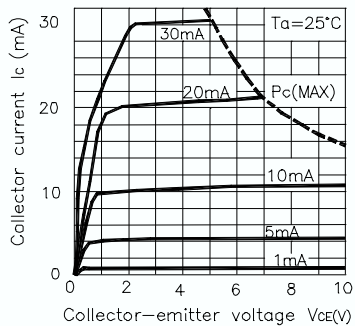


Fig. 4 Relative Current Transfer Ratio vs. Ambient Temperature

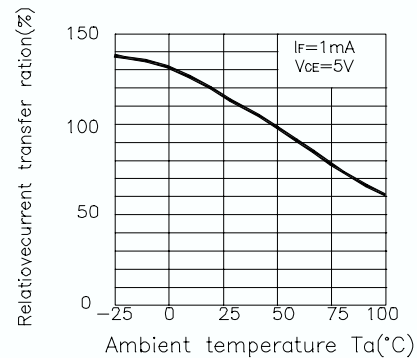


Fig. 5 Collector-emitter Saturation Voltage vs. Ambient Temperature


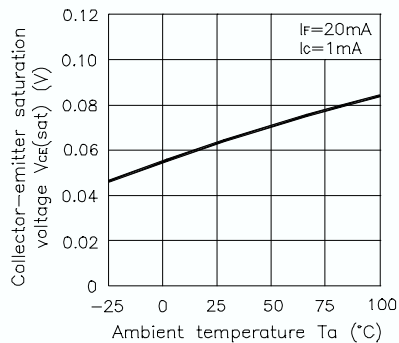


Fig. 6 Collector Dark Current vs. Ambient Temperature

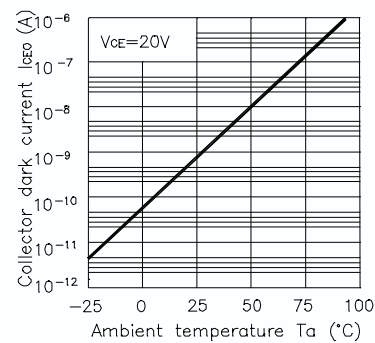

### KB814 SERIES

Fig. 7 Forward Current vs. Ambient Temperature

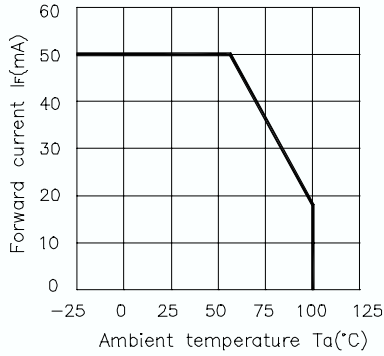


Fig. 8 Collector Power Dissipation vs. Ambient Temperature


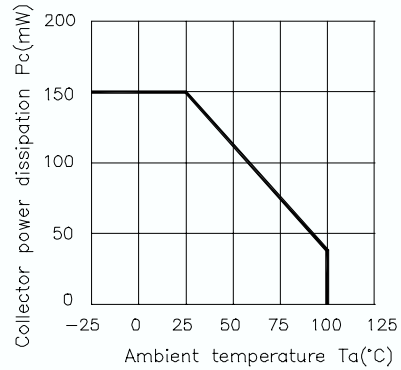


Fig. 9 Response Time vs. Load Resistance

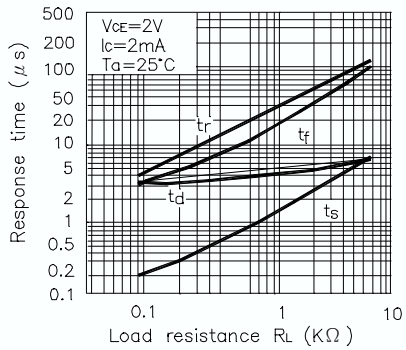

Test Circuit for Response Time


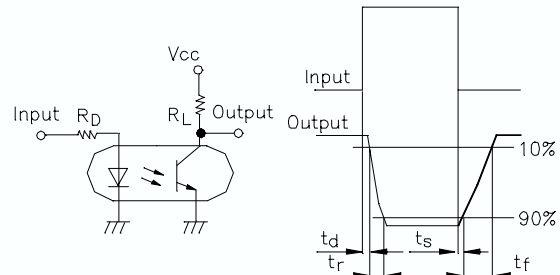


Fig. 10 Frequency Response

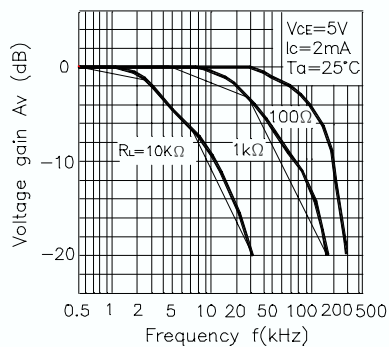

Test Circuit for Frequency Response





Fig. 11 Collector-emitter Saturation Voltage vs. Forward Current



### \* NOTES ON HANDLING

#### 1.Recommended soldering conditions (Dip soldering)

##### (1) Dip soldering

Temperature	260 ° C or below (molten solder temperature)
Time	Less than 10 seconds.
Cycle	
Flux	Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt % is recommended.)

##### (2) Cautions

###### Fluxes

Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.

#### 2.Cautions regarding noise

Be aware that power is suddenly into the component any surge current may cause damage happen, even if the voltage is within the absolute maximum ratings.

### CAUTION

Within this device there exists GaAs (Gallium Arsenide) material which is a harmful substance if ingested. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them.




### RESTRICTIONS ON PRODUCT USE

- The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version. Not all devices / types available in every country.
- We are mention about our product quality stability, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing KINGBRIGHT products, to observe standards of safety, and to a avoid situations in which a malfunction or failure of a KINGBRIGHT product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that KINGBRIGHT products are used within specified operating ranges as set forth in the most recent products specifications.


### KB814 SERIES

Dimension of Tube

TOLERANCE :  $\pm 0.4[\pm 0.012]$  UNLESS OTHERWISE NOTED.  
Unit:mm

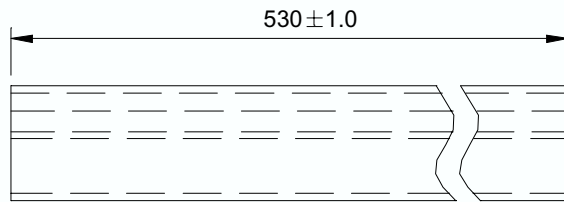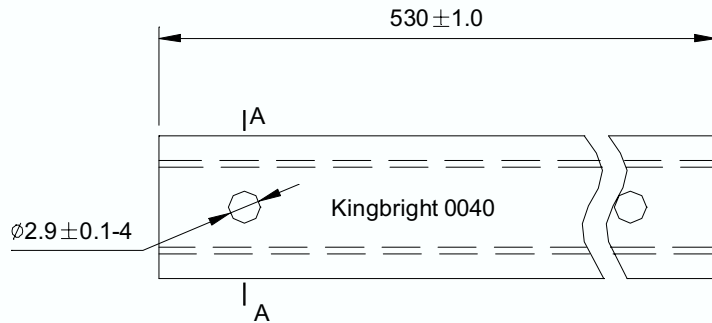

Dimension of Carton

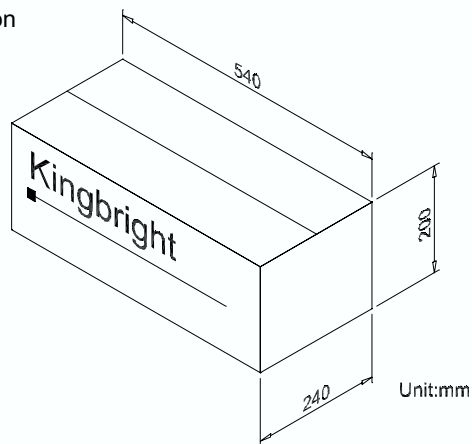

### KB817 Series

GENERAL PURPOSE  
HIGH ISOLATION VOLTAGE  
SINGLE TRANSISTOR TYPE  
PHOTOCOUPLER SERIES

### FEATURES

- 1.High isolation voltage between input and output (Viso=5000 Vr.m.s)
- 2.Compact dual-in-line package
  - KB817:1-channel type
  - KB827:2-channel type
  - KB837:3-channel type
  - KB847:4-channel type
- 3.Recognized by UL and CUL, file NO. E225308

### DESCRIPTION

- 1.The KB817 series are optically coupled isolators containing a GaAs light emitting diode and an NPN silicon phototransistor.
- 2.The lead pitch is 2.54mm

### APPLICATIONS


- 1.Computer terminals
- 2.Registers, copiers, automatic vending machines
- 3.System appliances, measuring instruments
- 4.Programmable logic controller
- 5.Signal transmission between circuits of different potentials and impedances

### KB817 Series

\* PACKAGE DIMENSIONS (UNIT: mm)

DIP Type

TOLERANCE :  $\pm 0.5[\pm 0.02]$  UNLESS OTHERWISE NOTED.

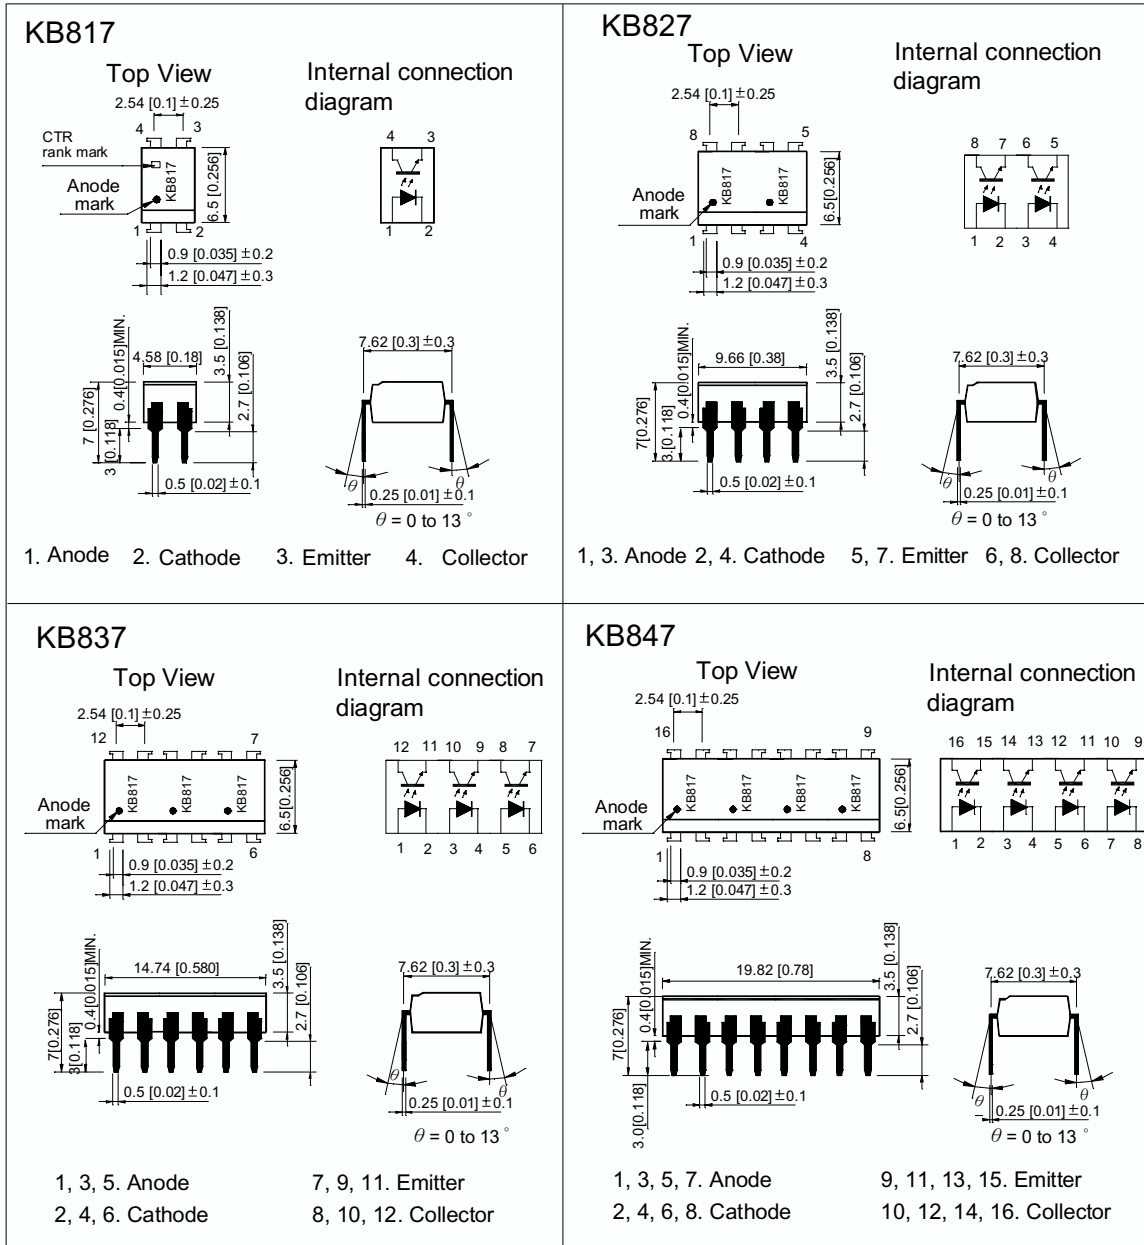

### KB817 Series

#### \*ORDERING INFORMATION

Part Number	Package	Package Style
KB817	4-pinDIP	100pcs/each tube
KB827	8-pinDIP	50pcs/each tube
KB837	12-pin DIP	30pcs/each tube
KB847	16-pin DIP	25pcs/each tube

#### \*Absolute Maximum Ratings (T<sub>a</sub>=25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I <sub>F</sub>	50	mA
	Reverse voltage	V <sub>R</sub>	6	V
	Power dissipation	P	70	mW
Output	Collector-emitter voltage	V <sub>CEO</sub>	35	V
	Emitter-collector voltage	V <sub>ECO</sub>	6	V
	Collector current	I <sub>C</sub>	50	mA
	Collector power dissipation	P <sub>C</sub>	150	mW
Total power dissipation		P <sub>tot</sub>	200	mW
*1Isolation voltage		Viso	5000	Vr.m.s
Operating temperature		T <sub>opr</sub>	-30~+100	°C
Storage temperature		T <sub>stg</sub>	-55~+125	°C
*2Soldering temperature		T <sub>sol</sub>	260	°C

\*1 40 to 60% RH,AC for 1 minute.

\*2 For 10 seconds.

### KB817 Series

#### \* Electro-optical Characteristics

Parameter		Symbol	Conditions	Min.	Typ.	Max.	Unit
Input	Forward voltage	$V_F$	$I_F=20mA$	—	1.2	1.4	V
	Peak forward voltage	$V_{FM}$	$I_{FM}=0.5A$	—	—	3.0	V
	Reverse current	$I_R$	$V_R=4V$	—	—	10	$\mu A$
Output	Collector dark current	$I_{CEO}$	$V_{CE}=20V, I_F=0mA$	—	—	$10^{-7}$	A
Transfer characteristics	*1 Current transfer ratio	CTR	$I_F=5mA, V_{CE}=5V$	50	—	600	%
	Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F=20mA, I_C=1mA$	—	0.1	0.2	V
	Cut-off frequency	$f_c$	$V_{CE}=5V, I_C=2mA$ $R_L=100\Omega, -3dB$	—	80	—	kHz
	Response time	Rise time	$t_r$	$V_{CE}=2V, I_C=2mA$ $R_L=100\Omega$	—	4	18
Fall time		$t_f$	—		3	18	$\mu S$

\*1 Classification table of current transfer ratio is shown below.

$$CTR = \frac{I_C}{I_F} \times 100\%$$

Model NO.	Rank mark	CTR (%)
KB817L	L	50 to 100
KB817A	A	80 to 160
KB817B	B	130 to 260
KB817C	C	200 to 400
KB817D	D	300 to 600
KB8x7AB	A or B	80 to 260
KB8x7BC	B or C	130 to 400
KB8x7CD	C or D	200 to 600
KB8x7AC	A,B or C	80 to 400
KB8x7BD	B,C or D	130 to 600
KB8x7AD	A,B,C or D	80 to 600
KB8x7	A,B,C,D or No mark	50 to 600

x: 1 or 2 or 3 or 4

### KB817 Series

Fig. 1 Current Transfer Ratio vs. Forward Current

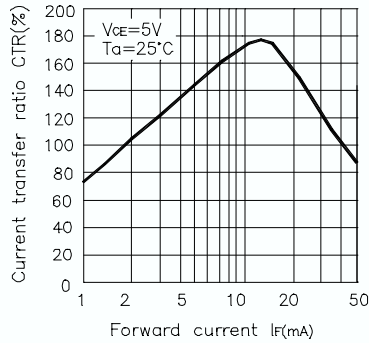


Fig. 2 Forward Current vs. Forward voltage

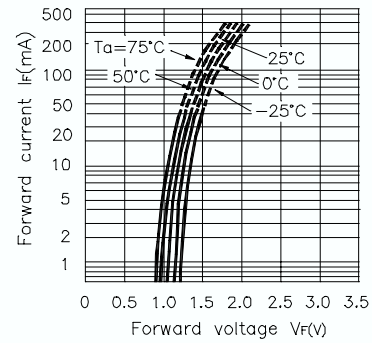


Fig. 3 Collector Current vs. Collector-emitter Voltage

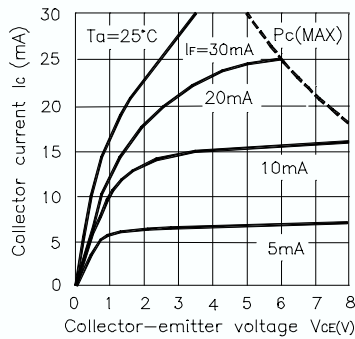


Fig. 4 Relative Current Transfer Ratio vs. Ambient Temperature

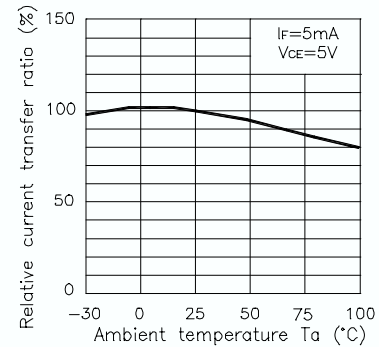


Fig. 5 Collector-emitter Saturation Voltage vs. Ambient Temperature



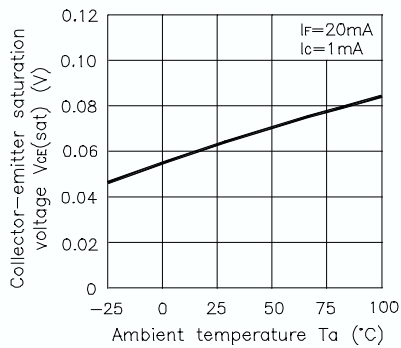


Fig. 6 Collector Dark Current vs. Ambient Temperature

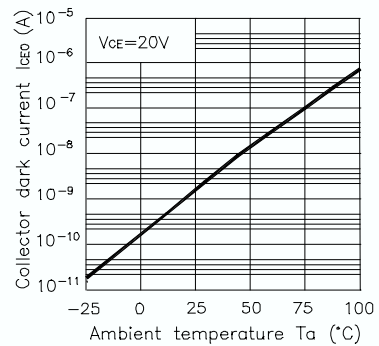


### KB817 Series


**Fig. 7 Forward Current vs. Ambient Temperature**

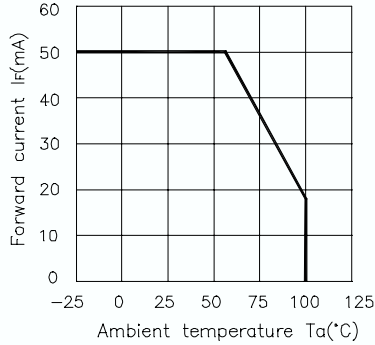


**Fig. 8 Collector Power Dissipation vs. Ambient Temperature**

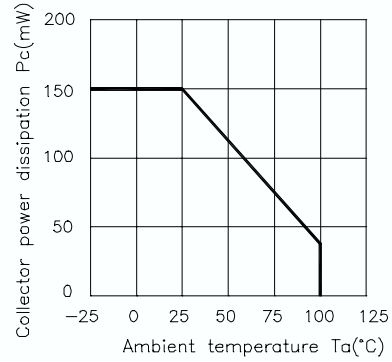


**Fig. 9 Response Time vs. Load Resistance**

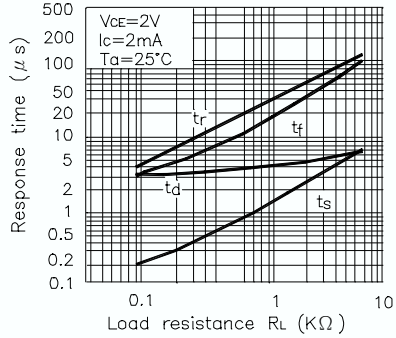


**Test Circuit for Response Time**

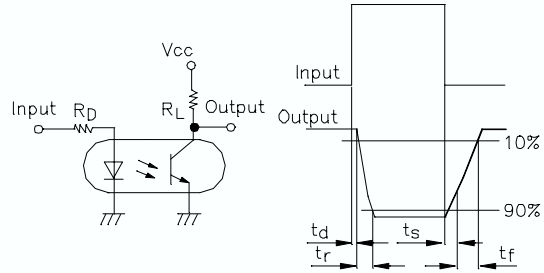


**Fig. 10 Frequency Response**

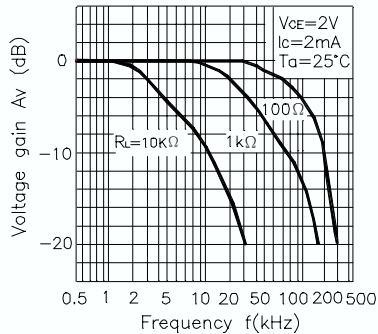

**Test Circuit for Frequency Response**



**Fig. 11 Collector-emitter Saturation Voltage vs. Forward Current**

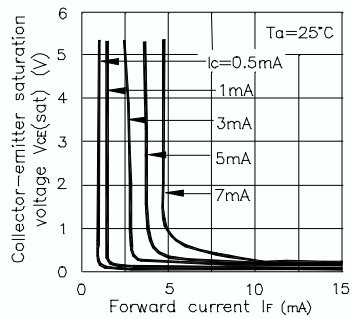

**\* NOTES ON HANDLING**

**1.Recommended soldering conditions (Dip soldering)**

**(1) Dip soldering**

Temperature	260 °C or below (molten solder temperature)
Time	Less than 10 seconds.
Cycle	One cycle allowed to be dipped in solder including plastic mold portion.
Flux	Rosin flux containing small amount of chlorine (The flux with a maximum chlorine content of 0.2 Wt % is recommended.)

**(2) Cautions**

**Fluxes**

Avoid removing the residual flux with freon-based and chlorine-based cleaning solvent.

**2.Cautions regarding noise**

Be aware that power is suddenly into the component any surge current may cause damage happen, even if the voltage is within the absolute maximum ratings.

### CAUTION

Within this device there exists GaAs (Gallium Arsenide) material which is a harmful substance if ingested. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them.

### RESTRICTIONS ON PRODUCT USE




- The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version. Not all devices / types available in every country.
- We mention about our product quality stability, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing KINGBRIGHT products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a KINGBRIGHT product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that KINGBRIGHT products are used within specified operating ranges as set forth in the most recent products specifications.

### KB817 Series

#### Dimension of Tube

TOLERANCE :  $\pm 0.4$  [ $\pm 0.012$ ] UNLESS OTHERWISE NOTED.

Unit:mm

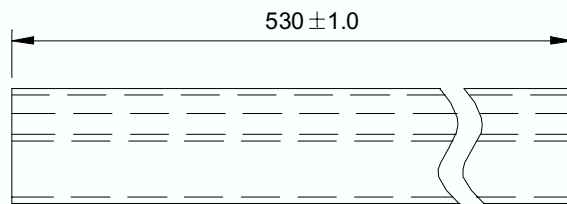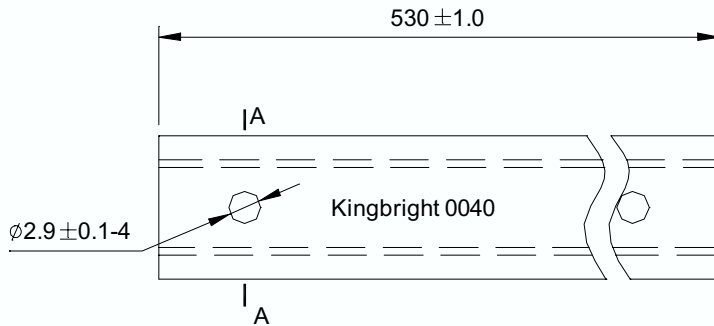

#### Dimension of Carton

